

Product data sheet

Specifications



discrete output module Modicon Quantum - 16 O - 20..253 V AC

140DAO84000

! To be discontinued on: 31 December 2022

! To be end-of-service on: 31 December 2030

! To be discontinued

Main

Range of product	Modicon Quantum automation platform
Product or component type	AC discrete output modules
Discrete output number	16

Complementary

Discrete output type	Isolated
Group of channels	16 groups of 1 channel
Supply frequency	47...63 Hz
Maximum voltage drop	1.5 V
Discrete output voltage	20...253 V AC
Addressing requirement	1 output word
Absolute maximum output	300 Vrms for 10 s AC 400 Vrms 1 cycle AC
Maximum load current	1 mA rms 24 Vrms off state leakage per output 1 mA rms 48 Vrms off state leakage per output 2 mA rms 115 Vrms off state leakage per output 2.5 mA rms 230 Vrms off state leakage per output 3 A rms 200...230 V per output 4 A rms 24...115 V per output 16 A rms per module 4 A rms sum of four points, continuous
Surge current	10 A during 3 cycles per point 20 A during 2 cycles per point 30 A during 1 cycle per point
DV/Dt	400 V/ms
Response time	<= 0.5 ms at state 0 to state 1 <= 0.5 ms at state 1 to state 0
Protection type	Internal by RC filter
Power dissipation	1.85 + (1.1 V x total module load current)
Associated fuse rating	5 A
Marking	CE
Local signalling	1 LED (green) for bus communication is present (Active) 1 LED (red) for external fault detected (F) 16 LEDs (green) for input status
Bus current requirement	350 mA

Module format	Standard
Net weight	0.485 kg

Environment

Product certifications	cUL FM Class 1 Division 2
Standards	UL 508 CSA C22.2 No 142
Electromagnetic compatibility	Electrostatic discharge immunity test - test level: 4 kV (contact discharge) conforming to IEC 801-2 Electrostatic discharge immunity test - test level: 8 kV (air discharge) conforming to IEC 801-2 Susceptibility to electromagnetic fields - test level: 10 V/m (80...1000 MHz) conforming to IEC 801-3
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-40...85 °C
Relative humidity	95 % without condensation
Operating altitude	<= 5000 m

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	621 g
Package 1 Height	16.3 cm
Package 1 width	4.5 cm
Package 1 Length	31.2 cm
Unit Type of Package 2	S03
Number of Units in Package 2	7
Package 2 Weight	5.444 kg
Package 2 Height	30 cm
Package 2 width	30 cm
Package 2 Length	40 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov


Contractual warranty

Warranty

18 months

Racks for Modules Mounting

Dimensions of Modules and Racks

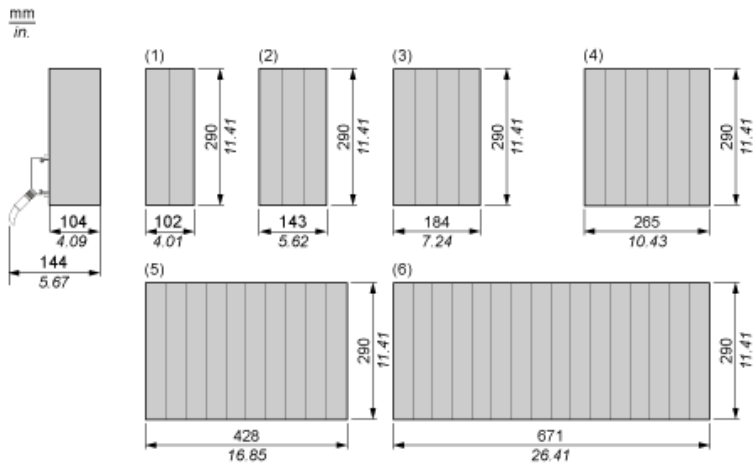


- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots

24...230 Vac Discrete Output Module

Wiring Diagram

5 A (see "Connectivity Compatibility" CAUTION on L N following page).

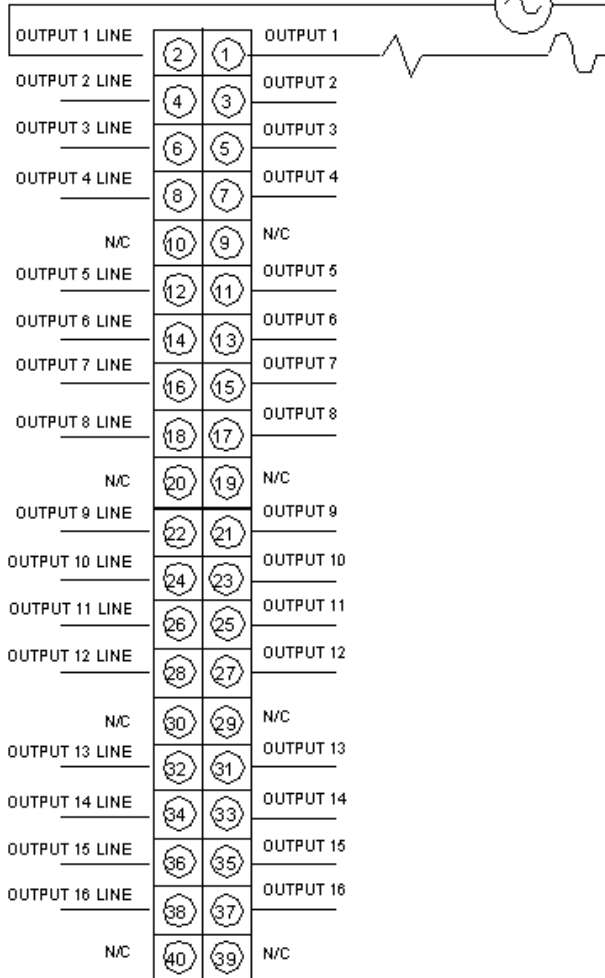

N/C Not Connected

Recommended replacement(s)

140DAO84000 is replaced by:

1x



discrete output module X80 - 16 outputs - triac - 100..240 V AC
BMXDAO1605